

09-18-00

A

Docket No.  
A-379

Total Pages in this Submission

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**GAS LASER APPARATUS EMITTING ULTRAVIOLET RADIATION**

and invented by:

**Koji KAKIZAKI et al**JCS11 U.S. PRO  
09/661481  
09/14/00If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

- ☐ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 24 (twenty-four) pages and including the following:
- a. ☒ Descriptive Title of the Invention
  - b. ☐ Cross References to Related Applications (if applicable)
  - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
  - d. ☐ Reference to Microfiche Appendix (if applicable)
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings (if drawings filed)
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.

A-379

Total Pages in this Submission

**Application Elements (Continued)**

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)

- a. ☒ Formal Number of Sheets 8 (eight)  
b. ☐ Informal Number of Sheets \_\_\_\_\_

4. ☒ Oath or Declaration

- a. ☒ Newly executed (original or copy) ☐ Unexecuted  
b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)  
c. ☒ With Power of Attorney ☐ Without Power of Attorney  
d. ☐ DELETION OF INVENTOR(S)

Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. 1.63(d)(2) and 1.33(b).

- ☐ Incorporation By Reference (usable if Box 4b is checked)

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

- ☐ Computer Program in Microfiche (Appendix)

- ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)

- a. ☐ Paper Copy  
b. ☐ Computer Readable Copy (identical to computer copy)  
c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

**Accompanying Application Parts**

8. ☒ Assignment Papers (cover sheet & document(s))  
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)  
10. ☐ English Translation Document (if applicable)  
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations  
12. ☐ Preliminary Amendment  
13. ☒ Acknowledgment postcard  
14. ☒ Certificate of Mailing

☐ First Class ☒ Express Mail (Specify Label No.): EL696074335US

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.

A-379

Total Pages in this Submission

**Accompanying Application Parts (Continued)**

15. ☒ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*

16. ☒ Additional Enclosures *(please identify below)*:

**Inventor Information Sheet (Patent Bibliographical Data)**

**Fee Calculation and Transmittal**

**CLAIMS AS FILED**

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	3	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	1	- 3 =	0	x \$78.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose) Assignment Recordation Fee					\$40.00
TOTAL FILING FEE					\$730.00

☒ A check in the amount of \$40.00 to cover the ~~issue~~ <sup>recording</sup> fee is enclosed.

☐ The Commissioner is hereby authorized to charge and credit Deposit Account No. as described below. A duplicate copy of this sheet is enclosed.


☐ Charge the amount of as filing fee.

☐ Credit any overpayment.

☐ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.

☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: September 14, 2000

  
Signature

James H. Walters, Reg. No. 35,731  
DELLETT AND WALTERS  
310 S.W. Fourth Avenue, Suite 1101  
Portland, Oregon 97204  
(503) 224-0115

cc:

**CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)**

Applicant(s): Koji KAKIZAKI et al

Docket No.

A-379

Serial No.

Filing Date

Examiner

Group Art Unit

Invention:

GAS LASER APPARATUS EMITTING ULTRAVIOLET RADIATION



I hereby certify that the following correspondence:

New Patent Application Transmittal (&amp; documents &amp; fees listed as enclosed therein)

(Identify type of correspondence)

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231 on

September 14, 2000

(Date)

James H. Walters

(Typed or Printed Name of Person Mailing Correspondence)

(Signature of Person Mailing Correspondence)

EL69607433SUS

("Express Mail" Mailing Label Number)

Note: Each paper must have its own certificate of mailing.

SCANNED # 12

INVENTOR INFORMATION

Inventor One Given Name:: Koji  
Family Name:: Kakizaki  
Postal Address Line One:: c/o Ushio Research Institute of  
Postal Address Line Two:: Technology Inc., 1-90, Komakado  
City:: Gotenba-shi  
State or Province:: Shizuoka  
Country:: JAPAN  
Postal or Zip Code:: 412-0038  
Country of Residence:: JAPAN  
Citizenship Country:: JAPAN  
Inventor Two Given Name:: Takashi  
Family Name:: Saito  
Postal Address Line One:: c/o Ushio Research Institute of  
Postal Address Line Two:: Technology Inc., 1-90, Komakado  
City:: Gotenba-shi  
State or Province:: Shizuoka  
Country:: JAPAN  
Postal or Zip Code:: 412-0038  
Country of Residence:: JAPAN  
Citizenship Country:: JAPAN  
Inventor Three Given Name:: Hidenori  
Family Name:: Watanabe  
Postal Address Line One:: c/o Ushio Research Institute of  
Postal Address Line Two:: Technology Inc., 1-90, Komakado  
City:: Gotenba-shi  
State or Province:: Shizuoka  
Country:: JAPAN  
Postal or Zip Code:: 412-0038  
Country of Residence:: JAPAN  
Citizenship Country:: JAPAN

CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 802  
Electronic Mail One:: jwalters@teleport.com

APPLICATION INFORMATION

Title Line One:: GAS LASER APPARATUS EMITTING ULTRAVIOLET  
Title Line Two:: RADIATION  
Total Drawing Sheets:: 8  
Formal Drawings?: Yes  
Application Type:: Utility  
Docket Number:: A-379  
Secrecy Order in Parent Appl.?: No

REPRESENTATIVE INFORMATION

Express Mail #EL690074 33505

Representative Customer Number:: 802  
Registration Number One:: 35731

PRIOR FOREIGN APPLICATIONS

Foreign Application One:: 11-261628  
Filing Date:: 09-16-1999  
Country:: JAPAN  
Priority Claimed:: Yes  
Foreign Application Two:: 2000-021581  
Filing Date:: 01-31-2000  
Country:: JAPAN  
Priority Claimed:: Yes

Source:: PrintEFS Version 1.0.1

TITLE OF THE INVENTION

GAS LASER APPARATUS EMITTING ULTRAVIOLET RADIATION

BACKGROUND OF THE INVENTION

The present invention relates to gas laser apparatus emitting ultraviolet radiation. More particularly, the present invention relates to gas laser apparatus, i.e. KrF excimer laser, ArF excimer laser, and fluorine laser, which perform a lasing operation with an extended oscillation pulse width.

With the achievement of small, fine and high-integration semiconductor integrated circuits, it has been demanded that projection exposure systems for the manufacture of such highly integrated circuits be improved in resolution. Under these circumstances, the wavelength of exposure light emitted from light sources for lithography is becoming shorter, and gas laser apparatus emitting ultraviolet radiation are promising as next-generation light sources for semiconductor lithography, i.e. KrF excimer laser of wavelength 248 nm, ArF excimer laser of wavelength 193 nm, and fluorine laser of wavelength 157 nm.

In these excimer laser apparatus, a laser gas is sealed in a laser chamber under several hundred kPa. That is, in the KrF excimer laser, a mixed gas of fluorine ( $F_2$ ) gas, krypton (Kr) gas and a rare gas, e.g. neon (Ne), as a buffer gas is sealed in the laser chamber as a laser gas.

In the ArF excimer laser, a mixed gas of fluorine ( $F_2$ ) gas, argon (Ar) gas and a rare gas, e.g. neon (Ne), as a buffer gas is similarly sealed in the laser chamber as a laser gas. In the  $F_2$  laser, a mixed gas of fluorine ( $F_2$ ) gas and a rare gas, e.g. helium (He) or/and neon (Ne), as a buffer gas is similarly sealed in the laser chamber as a laser gas. In these apparatus, the laser gas as a laser medium is excited by generating an electric discharge in the laser chamber.

In these gas laser apparatus, the oscillation pulse width ( $T_{1s}$ ) is about 20 ns at maximum. Therefore, the peak power of the output light is large. In addition, because the wavelength of the output light is short, the photon energy is high. Accordingly, the probability of occurrence of two-photon absorption is higher than in the case of mercury lamps, which are conventional light sources for lithography. For this reason, the optical elements of the projection exposure system may be damaged by a compaction (an increase in refractive index), etc., causing the performance of the projection exposure system to be degraded. The oscillation pulse width ( $T_{1s}$ ) is defined by

$$T_{1s} = [\int P(t) dt]^2 / \int P^2(t) dt$$

where  $P(t)$  is the laser intensity depending upon time  $t$ .

To avoid the above-described problem, therefore, it is demanded that the oscillation pulse width be extended (i.e. a longer pulse width should be achieved) without a change in energy per pulse, thereby reducing the peak



power of the output light. For example, a pulse width of 30 ns or longer is demanded.

There has heretofore been no particular proposition concerning an exciting circuit for realizing a longer pulse width in the above-described gas laser apparatus. However, there have been some propositions regarding the achievement of a longer pulse width in an excimer laser apparatus having a laser medium different from those mentioned above.

It is generally known that the discharge current flowing between the main discharge electrodes of an excimer laser apparatus is an oscillating current, and as shown in the waveform chart of Fig. 8, the first half-cycle of the oscillating current contributes to the laser oscillation [see "Excimer Laser" (first edition), edited by Mitsuo Maeda, p. 64, Japan Scientific Societies Press, August 20, 1983].

The conventional technique intends to extend the pulse width of the above-described first half-cycle for the purpose of achieving a longer pulse width. For example, Japanese Patent Application Unexamined Publication (KOKAI) No. Sho 62-2683 discloses an example in which, as shown in Fig. 9, an inductance  $L_a$  is added to one of the main discharge electrodes in the exciting circuit of a XeCl excimer laser. In addition, "The Review of Laser Engineering" Vol. 15, No. 7, pp. 63-72, shows an example in which a PFN (Pulse Forming Network) is used in the exciting circuit of a XeCl excimer laser.

It is conceivable that the application of the above-described conventional technique to the KrF excimer laser, ArF excimer laser and fluorine laser also allows realization of a longer pulse width of pulsed laser light emitted from the laser apparatus.

From the viewpoint of improving the throughput of lithographic processing for the manufacture of semiconductor devices, it has recently been demanded that excimer laser apparatus for lithography perform a high-repetition rate oscillating operation, i.e. 2 kHz or more. If it is intended to realize a longer pulse width in such a high-repetition rate oscillating operation with the conventional technique wherein an inductance is added to the main discharge circuit as shown in Fig. 9, the laser oscillating efficiency becomes extremely low. It is actually difficult with the conventional technique to realize a longer pulse width in the demanded high-repetition rate oscillating operation.

#### SUMMARY OF THE INVENTION

In view of the above-described problems with the prior art, an object of the present invention is to extend the oscillation pulse width in gas laser apparatus emitting ultraviolet radiation, e.g. KrF excimer laser, ArF excimer laser and fluorine laser, which perform a high-repetition rate oscillating operation.

To attain the above-described object, the present invention provides a gas laser apparatus emitting

ultraviolet radiation that has a pair of laser discharge electrodes connected to output terminals of a magnetic pulse compression circuit and disposed in a laser chamber. The gas laser apparatus performs a laser oscillating operation by the first half-cycle of the discharge oscillating current waveform of one pulse in which the polarity is reversed, together with at least one half-cycle subsequent to the first half-cycle.

When the gas laser apparatus emitting ultraviolet radiation is an ArF excimer laser, the magnetic pulse compression circuit has a series circuit including a first magnetic switch and a first capacitor. A second capacitor is connected to both ends of the series circuit. A second magnetic switch is connected at one end thereof to the junction between the first magnetic switch and the second capacitor. The other end of the second magnetic switch and the other end of the second capacitor constitute the above-described output terminals. When the capacitance of the second capacitor is 12 to 16 nF, and the capacitance of a peaking capacitor of the laser apparatus that is connected between the output terminals in parallel to the pair of laser discharge electrodes is 10 to 16 nF, and further the inductance of a circuit loop formed by the peaking capacitor and the pair of laser discharge electrodes is 5 to 8 nH, and further the distance between the pair of laser discharge electrodes is 15 to 20 mm, and further the partial pressure of fluorine in the laser chamber is less than 0.12% of the total pressure of the

laser gas, the rise time required for a voltage applied between the pair of laser discharge electrodes to reach a voltage at which breakdown occurs is not more than 80 ns.

5 It is desirable that the voltage at which breakdown occurs between the pair of laser discharge electrodes be from 18 to 28 kV, and that the rise time of the voltage be not less than 40 ns.

10 Thus, it is possible to realize KrF excimer laser apparatus, ArF excimer laser apparatus and fluorine laser apparatus, which perform a high-repetition rate and extended-pulse width oscillating operation in which the repetition frequency is 2 kHz or more and the oscillation pulse width is 30 ns or more by arranging the apparatus so that a laser oscillating operation is performed by the  
15 first half-cycle of the discharge oscillating current waveform of one pulse in which the polarity is reversed, together with at least one half-pulse, preferably two half-pulses, subsequent to the first half-cycle.

20 Still other objects and advantages of the invention will in part be obvious and will in part be apparent from the specification.

The invention accordingly comprises the features of construction, combinations of elements, and arrangement of parts which will be exemplified in the construction  
25 hereinafter set forth, and the scope of the invention will be indicated in the claims.

# BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a waveform chart for describing the principle of an ArF excimer laser apparatus according to the present invention.

5        Fig. 2 is a sectional view in a direction perpendicular to the laser oscillation direction of an example of ArF excimer laser apparatus to which the present invention is applied.

10       Fig. 3 is a circuit diagram showing an example of an exciting circuit according to the present invention.

15       Fig. 4 is a diagram showing an example of a voltage waveform occurring at each capacitor position of the exciting circuit shown in Fig. 3.

20       Fig. 5 is a diagram showing the results of an examination of the relationship between the laser pulse width and the laser output energy on the one hand and, on the other, the rise time required for the discharge voltage to reach a breakdown voltage.

25       Fig. 6 is a diagram for describing the definition of the rise time.

      Fig. 7 is a diagram showing the voltage between discharge electrodes, the current flowing between the discharge electrodes and the laser output light waveform in an embodiment of the present invention.

      Fig. 8 is a diagram showing the discharge current and the laser light intensity in a conventional excimer laser apparatus.

      Fig. 9 is a circuit diagram showing an exciting

circuit of a conventional excimer laser apparatus designed to achieve a longer pulse width.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

5       The principle of the present invention, together with an embodiment thereof, will be described below with reference to the accompanying drawings.

10       The present inventors have succeeded in realizing a high-repetition rate and extended-pulse width oscillating operation of an ArF excimer laser apparatus by adopting an approach entirely different from those in the prior art. First, the principle of the present invention will be described below.

15       As a result of exhaustive studies, the present inventors have found that it is possible to realize a longer pulse width by determining circuit constants so that the period of the oscillating current flowing between the discharge electrodes is shortened and, at the same time, the peak value of the current is increased.

20       More specifically, it has heretofore been considered that only the first half-cycle of the oscillating current contributes to the laser oscillation, as stated above. Actually, the conventional excimer laser apparatus do not perform a laser oscillating operation during the period of  
25       time after the first half-cycle of the oscillating current. However, as shown in the waveform chart of Fig. 1, it is possible to realize a longer pulse width by determining circuit constants so that the period of the oscillating

current flowing between the discharge electrodes is shortened and, at the same time, the peak value of the current is increased (a specific circuit configuration and specific circuit constants will be described later),  
5 whereby the laser gas is continuously excited even during at least one half-cycle subsequent to the first half-cycle of the oscillating current to sustain the laser oscillating operation.

A specific example of an ArF excimer laser apparatus according to the present invention, together with a specific example of an exciting circuit thereof, will be shown below.

Fig. 2 is a sectional view in a direction perpendicular to the laser oscillation direction of an ArF excimer laser apparatus to which the present invention is applied. A laser cavity 1 is filled with a laser gas 2 (a mixed gas of Ar gas,  $F_2$  gas and Ne gas). Main discharge electrodes 3 and 4 for exciting the laser gas 2 are disposed to face each other in a direction perpendicular to the laser oscillation direction. The laser gas 2 is circulated by a fan (not shown) so as to form a gas stream 2' between the opposed main discharge electrodes 3 and 4. Corona preionization electrode units 10 are disposed on the upstream and downstream sides, respectively, of the stream 2' of laser gas 2 in parallel to one main discharge electrode 4. The corona preionization electrode units 10 perform a corona discharge operation immediately before the application of a pulse voltage between the main

discharge electrodes 3 and 4 to generate a main electric discharge, thereby irradiating the laser gas 2 between the main discharge electrodes 3 and 4 with ultraviolet radiation 6 and thus weakly ionizing the laser gas 2 to promote excitation by the main discharge electrodes 3 and 4.

In this example, each corona preionization electrode unit 10 includes a first electrode 11 and a second electrode 13. The first electrode 11 is a circular column-shaped electrode inserted into a tube 12, one end of which is closed. The tube 12 is made of a dielectric material, e.g. high-purity alumina ceramics. The second electrode 13 is a rectangular plate-shaped electrode. The plate-shaped member constituting the second electrode 13 is bent in the vicinity of a straight edge 13' thereof. The edge 13' of the second electrode 13 is parallel to and in line contact with the outer surface of the dielectric tube 12. The second electrode 13 has a plurality of openings provided in a portion of the rectangular plate-shaped member other than at least the edge 13'. The position at which the edge 13' of the second electrode 13 contacts the outer surface of the dielectric tube 12 around the first electrode 11 is set at a position from which the laser excitation space between the main discharge electrodes 3 and 4 is visible.

An exciting circuit arranged as shown in Fig. 3 applies a main discharge voltage between the main discharge electrodes 3 and 4 of the ArF excimer laser apparatus and also applies a predischage voltage between



the electrodes 11 and 13 of each corona preionization electrode unit 10.

The exciting circuit shown in Fig. 3 is a two-stage magnetic pulse compression circuit using three magnetic switches SL0, SL1 and SL2 formed from saturable reactors, respectively. The magnetic switch SL0 protects a solid-state switch SW. The first magnetic switch SL1 and the second magnetic switch SL2 constitute a two-stage magnetic pulse compression circuit.

The arrangement and operation of the circuit will be described below with reference to Fig. 3. First, the voltage of a high-voltage power source HV is adjusted to a predetermined value, and a main capacitor C0 is charged through the magnetic switch SL0 and an inductance L1. At this time, the solid-state switch SW is OFF. Upon completion of the charging of the main capacitor C0, the solid-state switch SW turns ON. At this time, the voltage across the solid-state switch SW shifts so as to be applied across the magnetic switch SL0, thereby protecting the solid-state switch SW. When the time integration value of the charging voltage V0 across the main capacitor C0, which is applied across the magnetic switch SL0, reaches a critical value determined by the characteristics of the magnetic switch SL0, the magnetic switch SL0 is saturated to turn ON. Consequently, an electric current flows through a loop formed by the main capacitor C0, the magnetic switch SL0, the solid-state switch SW and a capacitor C1. As a result, the electric charge stored in

the main capacitor C0 is transferred to and stored in the capacitor C1.

Thereafter, when the time integration value of the voltage V1 across the capacitor C1 reaches a critical value determined by the characteristics of the magnetic switch SL1, the magnetic switch SL1 is saturated to turn ON. Consequently, an electric current flows through a loop formed by the capacitor C1, a capacitor C2 and the magnetic switch SL2. As a result, the electric charge stored in the capacitor C1 is transferred to and stored in the capacitor C2.

Thereafter, when the time integration value of the voltage V2 across the capacitor C2 reaches a critical value determined by the characteristics of the magnetic switch SL2, the magnetic switch SL2 is saturated to turn ON. Consequently, an electric current flows through a loop formed by the capacitor C2, a peaking capacitor Cp and the magnetic switch SL2. As a result, the electric charge stored in the capacitor C2 is transferred to and stored in the peaking capacitor Cp.

As will be clear from the description given in connection with Fig. 2, a corona discharge for preionization occurs at the outer peripheral surface of the dielectric tube 12, starting from the position at which the second electrode 13 contacts the dielectric tube 12. More specifically, as the charging of the peaking capacitor Cp, which is shown in Fig. 3, proceeds, the voltage V3 across the peaking capacitor Cp increases. When

the voltage V3 reaches a predetermined value, a corona discharge occurs at the surface of the dielectric tube 12 of each corona preionization electrode unit 10. The corona discharge causes ultraviolet radiation 6 to be generated at the surface of the dielectric tube 12. The ultraviolet radiation 6 preionizes the laser gas 2 flowing between the main discharge electrodes 3 and 4 as a laser medium.

As the charging of the peaking capacitor Cp further proceeds, the voltage V3 across the peaking capacitor Cp increases. When the voltage V3 reaches a certain value (breakdown voltage) Vb, a dielectric breakdown occurs in the laser gas 2 between the main discharge electrodes 3 and 4, and thus a main discharge starts. The laser medium is excited by the main discharge, and laser light is generated.

As a result of the main discharge, the voltage across the peaking capacitor Cp lowers rapidly and eventually returns to the state before the start of charging.

The above-described discharging operation is repeated by the switching operation of the solid-state switch SW, whereby pulsed laser oscillation is performed at a predetermined repetition frequency.

Thus, a combination of the magnetic switch SL1 and the capacitor C1 forms a capacitive transfer circuit constituting a first stage, and a combination of the magnetic switch SL2 and the capacitor C2 forms a capacitive transfer circuit constituting a second stage.

By setting the inductance of each capacitive transfer circuit so that the inductance becomes smaller as the ordinal number of stages increases, a pulse compression operation is carried out such that the pulse width of an electric current pulse flowing through each stage narrows successively. Consequently, a strong discharge of short pulse is realized between the main discharge electrodes 3 and 4.

Fig. 4 shows an example of a voltage waveform occurring at each capacitor position of the above-described exciting circuit, i.e. at the capacitors C1 and C2 and the peaking capacitor Cp. Fig. 4 clearly shows the way in which the pulse width is compressed successively.

Incidentally, when the ArF excimer laser apparatus is used as a light source for semiconductor lithography, a discharge volume necessary for lithography is naturally determined by the laser output energy necessary for lithography. In view of the discharge voltage, the distance between the main discharge electrodes 3 and 4 needs to be about 15 to 20 mm. Because the laser output energy is determined by the capacitance of the peaking capacitor Cp, when the ArF excimer laser apparatus is used as a light source for semiconductor lithography, the capacitance of the peaking capacitor Cp needs to be 10 to 16 nF.

As has been stated above, in order to allow laser oscillation to continue even during the period of time after the first half-cycle of the oscillating current

flowing between the main discharge electrodes 3 and 4 on the basis of the present invention, it is necessary to determine circuit constants so that the peak value of the electric current is increased. The voltage (breakdown voltage)  $V_b$  at which an electric discharge starts between the main discharge electrodes 3 and 4 depends on the rise of the voltage applied between the main discharge electrodes 3 and 4. When the rise time is short, the discharge starting voltage  $V_b$  becomes high (occurrence of an overvoltage). Therefore, in order to increase the peak value of the electric current, it is necessary to make the applied voltage increase sharply. The larger the capacitance of the capacitor  $C_2$  with respect to that of the peaking capacitor  $C_p$ , the sharper the rise of the voltage. Accordingly, it is desirable to increase the capacitance of the capacitor  $C_2$ . However, as the capacitance of the capacitor  $C_2$  is increased, the amount of energy required to drive the whole laser apparatus increases. As a result, the efficiency of the laser apparatus reduces unfavorably. Therefore, there is a limit to the increase in capacitance of the capacitor  $C_2$ . When the ArF excimer laser apparatus is used as a light source for semiconductor lithography, the capacitance of the capacitor  $C_2$  is set at 12 to 16 nF.

In addition, it is necessary to reduce the electric resistance of the laser gas 2 in order to increase the peak value of the electric current during the second and later half-cycles of the oscillating current flowing

between the main discharge electrodes 3 and 4 so that laser oscillation is continued even during the second and later half-cycles. When the ArF excimer laser apparatus uses a laser gas consisting essentially of  $\text{Ar}+\text{F}_2+\text{Ne}$  at 3 to 4 atmospheric pressure, the electric resistance of the laser gas becomes lower as the partial pressure of fluorine decreases. Therefore, it is desirable that the fluorine partial pressure with respect to the total pressure of the laser gas be less than 0.12%.

As has been stated above, it is necessary in order to continue the laser oscillation even during the second and later half-cycles to shorten the period of the oscillating current flowing between the main discharge electrodes 3 and 4. If the period of the oscillating current flowing is long, spatial concentration of electric discharge occurs during the latter half of the first half-cycle. As a result, the required uniform excitation cannot be performed efficiently. Parameters that determine the period of the oscillating current flowing are the capacitance and stray inductance in the loop (discharge current circuit) formed by the peaking capacitor  $C_p$  and the main discharge electrodes 3 and 4 in the exciting circuit shown in Fig. 3. The root of the product of the capacitance and the stray inductance is proportional to the period of the oscillating current flowing. Accordingly, to shorten the period, the stray inductance in the discharge current circuit should be minimized. However, because the size of the stray inductance is determined by

the sectional area of the laser cavity, the stray inductance cannot actually be reduced to a value smaller than about 5 to 8 nH.

We examined the relationship between the output laser pulse width ( $T_{ls}$ ) and the output energy on the one hand and, on the other, the rise time required for the discharge voltage to reach the breakdown voltage  $V_b$  for the discharge volume defined by the discharge width of 5 to 8 mm  $\times$  the interelectrode distance of 15 to 20 mm  $\times$  the length of 450 to 550 mm under the conditions where the parameters were selected in the above-described ranges.

The results of the examination are shown in Fig. 5. It should be noted that the rise time required for the discharge voltage to reach the breakdown voltage  $V_b$  is defined as shown in Fig. 6. The steepest portion of the rise in the first half-cycle of the voltage  $V_3$  applied between the main discharge electrodes 3 and 4 is approximated to a straight line, and the rise time is defined as the period of time required for the straight line to reach a point at which the straight line intersects the straight line of breakdown voltage  $V_b$  from a point at which the straight line intersects the straight line of voltage 0.

As will be understood from the results shown in Fig. 5, when the rise time was less than 40 ns, the laser light output reduced, so that it was impossible to obtain the desired output. When the rise time was more than 80 ns, the pulse width of the output laser light decreased, so

that it was impossible to obtain the desired pulse width.

The reason why the laser light output reduces when the rise time is less than 40 ns is considered to be due to the fact that it is impossible to ensure the period of time required for the interval between the start of corona preionization and the start of the main discharge. That is, because the rise time is excessively short, the main discharge starts undesirably before the laser gas is sufficiently preionized. Thus, the laser output reduces because of the insufficient excitation of the laser gas.

On the other hand, when the rise time is more than 80 ns, it is considered that because the rise time is excessively long, the attained value of the breakdown voltage  $V_b$  is small; therefore, laser oscillation does not take place during the second half-cycle, resulting in a shortened pulse width.

In general, when the rise time is short, the discharge starting voltage  $V_b$  becomes high (occurrence of an overvoltage), and the discharge input  $(1/2 \times C_p V_b^2)$ , which is the excitation energy for the laser medium, increases. Consequently, the oscillation efficiency increases. When the rise time is more than 80 ns, it is considered that the discharge starting voltage  $V_b$  does not become high, and the electric discharge is likely to become unstable. Moreover, the discharge input is small, and the oscillation efficiency reduces. Therefore, in the current waveform shown in Fig. 1, the oscillating current cannot contribute to the laser oscillation during the period of



time after the first half-cycle. Consequently, the oscillation pulse width is reduced.

In the above-described examination, the discharge starting voltage  $V_b$  required in the rise time range of  
5 from 40 ns to 80 ns was 18 to 28 kV.

It should be noted that the adjustment of the rise time was realized by adjusting the capacitance of each of the second capacitor  $C_2$  and the peaking capacitor  $C_p$ , the residual inductance in the second magnetic switch  $SL_2$  and  
10 the stray inductance in the charging current circuit of the peaking capacitor  $C_p$ .

Fig. 7 shows the voltage between the discharge electrodes, the current flowing between the discharge electrodes and the laser output light waveform in a case  
15 where: the capacitance of the second capacitor  $C_2$  was 14 nF; the capacitance of the peaking capacitor  $C_p$  was 12 nF; the stray inductance in the discharge current circuit was 6 nH; the distance between the discharge electrodes was 18 mm; the discharge starting voltage was  
20 26 kV; the fluorine partial pressure was 0.08%; and the effective discharge length was 500 mm.

Thus, we have succeeded in realizing a high-repetition rate and extended-pulse width ArF excimer laser apparatus providing a repetition frequency of 2 kHz or  
25 more and a pulse width ( $T_{is}$ ) of 30 ns or more by adopting the above-described arrangement based on a novel idea according to the present invention that is entirely different from the technical ideas of the prior art.

Although the present invention has been described above with regard to the ArF excimer laser apparatus, it will be clear that the above-described basic principle is also applicable to KrF excimer laser apparatus similarly effecting discharge excitation of a mixed gas as a laser gas which consists essentially of fluorine (F<sub>2</sub>) gas, krypton (Kr) gas and a rare gas, e.g. neon (Ne), as a buffer gas, and also applicable to fluorine laser apparatus similarly effecting discharge excitation of a mixed gas as a laser gas which consists essentially of fluorine (F<sub>2</sub>) gas and a rare gas, e.g. helium (He) and/or neon (Ne), as a buffer gas.

Although the gas laser apparatus emitting ultraviolet radiation according to the present invention has been described above on the basis of the principle and embodiments thereof, it should be noted that the present invention is not limited to the foregoing embodiments but can be modified in a variety of ways.

As will be clear from the foregoing description, the gas laser apparatus emitting ultraviolet radiation according to the present invention is arranged to perform a laser oscillating operation by the first half-cycle of the discharge oscillating current waveform of one pulse in which the polarity is reversed, together with at least one half-cycle subsequent to the first half-cycle, whereby it is possible to realize a gas laser apparatus emitting narrow-band ultraviolet radiation at a high-repetition frequency of 2 kHz or more and with an extended

oscillation pulse width of 30 ns or more, which is particularly suitable for use as a light source for semiconductor lithography.

WHAT WE CLAIM IS:

1. A gas laser apparatus emitting ultraviolet radiation, comprising:

a laser chamber;

5 a magnetic pulse compression circuit; and

a pair of laser discharge electrodes connected to output terminals of said magnetic pulse compression circuit and disposed in said laser chamber;

wherein a laser oscillating operation is performed  
10 by a first half-cycle of a discharge oscillating current waveform of one pulse in which a polarity is reversed, together with at least one half-cycle subsequent to the first half-cycle.

2. A gas laser apparatus emitting ultraviolet  
15 radiation according to claim 1, which is an ArF excimer laser apparatus, wherein said magnetic pulse compression circuit has:

a series circuit including a first magnetic switch and a first capacitor;

20 a second capacitor connected to both ends of said series circuit; and

a second magnetic switch connected at one end thereof to a junction between said first magnetic switch and said second capacitor;

25 wherein the other end of said second magnetic switch and the other end of said second capacitor constitute said output terminals;

wherein when a capacitance of said second capacitor

is 12 to 16 nF, and a capacitance of a peaking capacitor of said laser apparatus that is connected between said output terminals in parallel to said pair of laser discharge electrodes is 10 to 16 nF, and further an

- 5 inductance of a circuit loop formed by said peaking capacitor and said pair of laser discharge electrodes is 5 to 8 nH, and further a distance between said pair of laser discharge electrodes is 15 to 20 mm, and further a partial pressure of fluorine in said laser chamber is less than
- 10 0.12% of a total pressure of a laser gas,

a rise time required for a voltage applied between said pair of laser discharge electrodes to reach a voltage at which breakdown occurs is not more than 80 ns.

3. A gas laser apparatus emitting ultraviolet
- 15 radiation according to claim 2, wherein the voltage at which breakdown occurs between said pair of laser discharge electrodes is from 18 to 28 kV, and said rise time of the voltage is not less than 40 ns.

# ABSTRACT

The oscillation pulse width is extended in a gas laser apparatus emitting ultraviolet radiation by a high-repetition rate oscillating operation. The gas laser apparatus has a pair of laser discharge electrodes connected to the output terminals of a magnetic pulse compression circuit and disposed in a laser chamber. The pulse width is extended by determining circuit constants so that the period of the oscillating current flowing between the discharge electrodes is shortened and, at the same time, the peak value of the current is increased, whereby the laser gas is continuously excited even during at least one half-cycle subsequent to the first half-cycle of the oscillating current to sustain the laser oscillating operation.

Express Mail #EL69307435505

FIG. 1

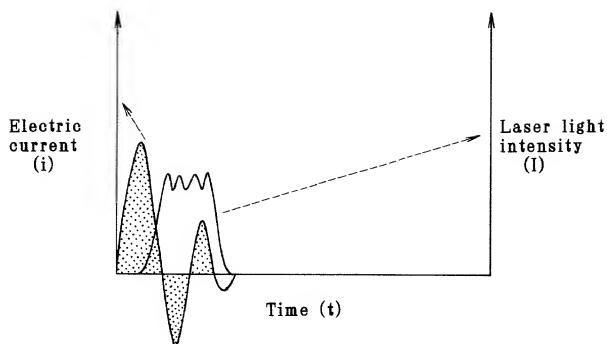






FIG. 3

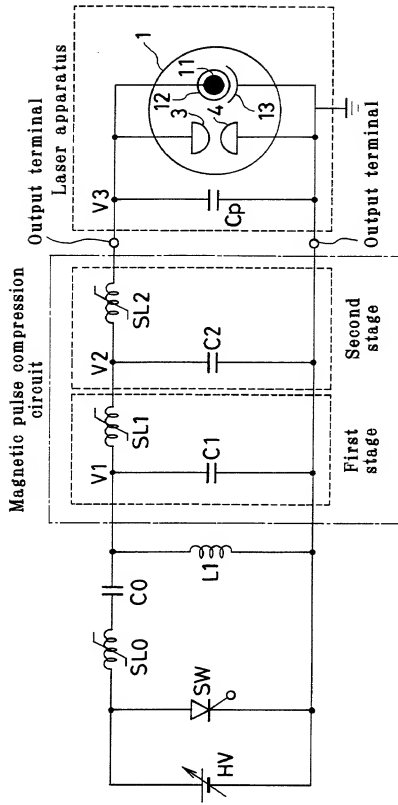


FIG. 4

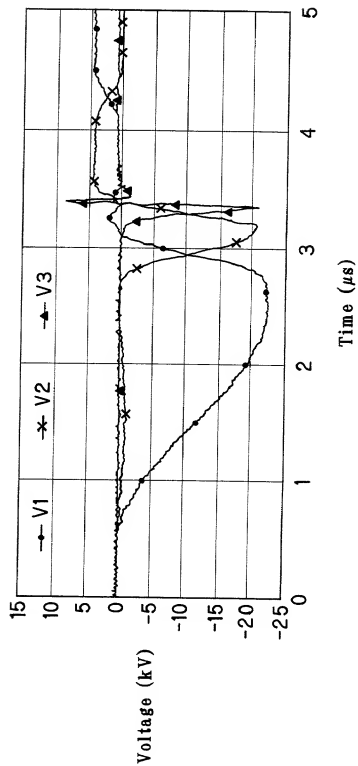


FIG. 5

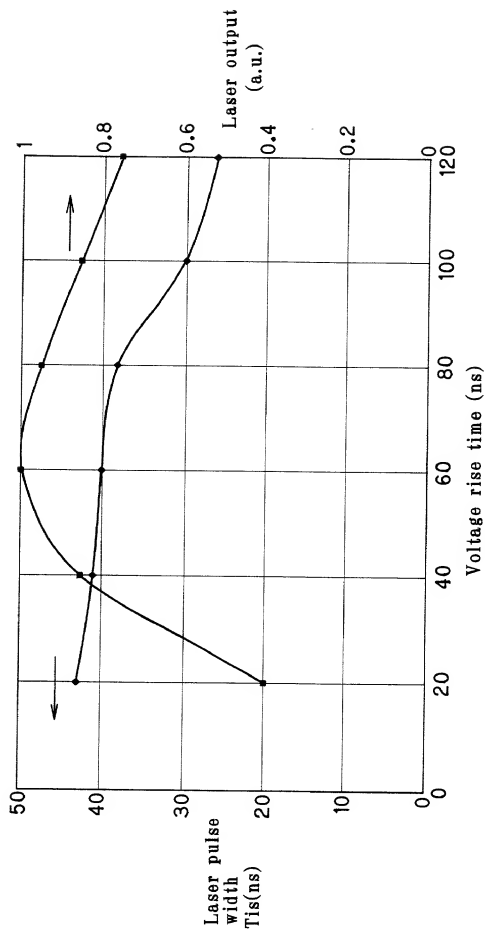


FIG. 6

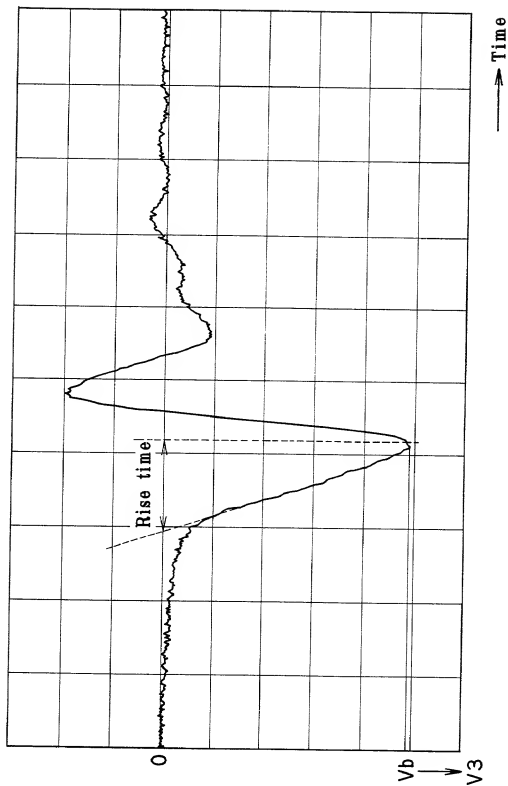


FIG. 7

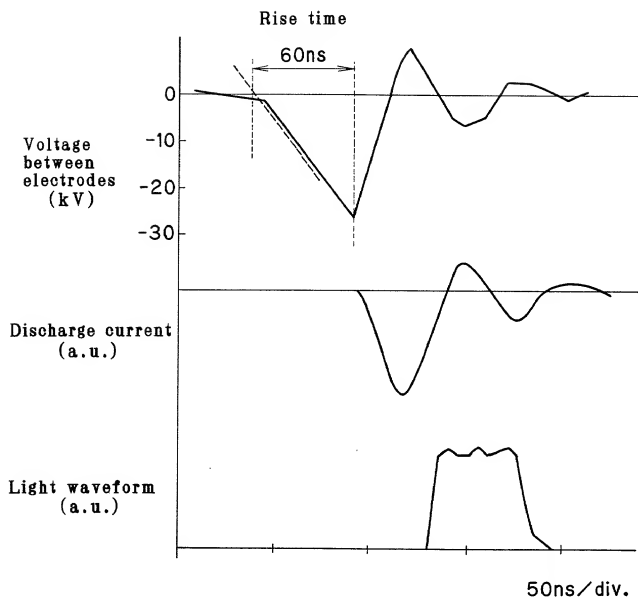


FIG. 8


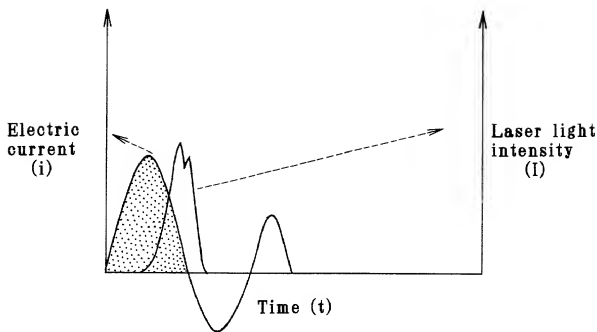


FIG. 9

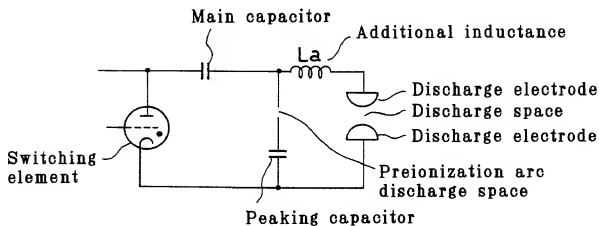

Attorney's Docket No. A-379

COMBINED DECLARATION AND POWER OF ATTORNEY  
(ORIGINAL APPLICATION)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

GAS LASER APPARATUS EMITTING ULTRAVIOLET RADIATION

the specification of which is attached hereto unless box (a) or (b) is checked, in which case

- (a) ☐ the specification was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_  
(b) ☐ the specification was filed as PCT International Application No. \_\_\_\_\_ filed on \_\_\_\_\_ and was amended under PCT Art. 19 on \_\_\_\_\_ (if any).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, sec. 1.56.

I have identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America and filed less than 12 months (6 months for designs) prior to this United States application and of which I claim foreign priority benefits under Title 35, United States Code, sec. 119, and I have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

EARLIEST FOREIGN APPLICATION, AND ALL FOREIGN  
APPLICATIONS FILED MORE THAN 12 MONTHS (6 MONTHS FOR DESIGN)  
PRIOR TO THIS U. S. APPLICATION

<u>Country</u>	<u>Application No.</u>	<u>Date of Filing</u> (Month/day/year)
<u>Japan</u>	<u>11-261628</u>	<u>09/16/99</u>
<u>Japan</u>	<u>2000-021581</u>	<u>01/31/00</u>
<u>          </u>	<u>                  </u>	<u>                  </u>

As a named inventor, I hereby appoint the following attorneys to prosecute this application and transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent:

James H. Walters, Reg. No. 35,731  
Michael O. Scheinberg, Reg. No. 36,919

Send correspondence to:

DELLETT AND WALTERS  
310 S. W. Fourth Avenue  
Suite 1101  
Portland, Oregon 97204

(503) 224-0115

I authorize the attorneys that I have appointed to accept instructions regarding this application and the resulting patent from Azusa Patent Office.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under Title 18, United States Code, sec. 1001, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first joint inventor Koji KAKIZAKI  
Inventor's signature Koji Kakizaki  
Date September 6, 2000 Country of Citizenship Japan  
Residence Same as post office address  
Post Office Address c/o USHIO RESEARCH INSTITUTE OF TECHNOLOGY INC.,  
1-90, Komakado, Gotenba-shi, SHIZUOKA 412-0038 JAPAN  
Full name of second joint inventor, if any Takashi SAITO  
Inventor's signature Takashi Saito  
Date September 6, 2000 Country of Citizenship Japan  
Residence Same as post office address  
Post Office Address c/o USHIO RESEARCH INSTITUTE OF TECHNOLOGY INC.,  
1-90, Komakado, Gotenba-shi, SHIZUOKA 412-0038 JAPAN



Full name of third joint inventor, if any Hidenori WATANABE  
Inventor's signature Hidenori Watanabe  
Date September 6, 2000 Country of Citizenship Japan  
Residence Same as post office address  
Post Office Address c/o USHIO RESEARCH INSTITUTE OF TECHNOLOGY INC.,  
1-90, Komakado, Gotenba-shi, SHIZUOKA 412-0038 JAPAN

Full name of fourth joint inventor, if any \_\_\_\_\_  
Inventor's signature \_\_\_\_\_  
Date \_\_\_\_\_ Country of Citizenship \_\_\_\_\_  
Residence \_\_\_\_\_  
Post Office Address \_\_\_\_\_

Full name of fifth joint inventor, if any \_\_\_\_\_  
Date \_\_\_\_\_ Country of Citizenship \_\_\_\_\_  
Residence \_\_\_\_\_  
Post Office Address \_\_\_\_\_

Full name of sixth joint inventor, if any \_\_\_\_\_  
Inventor's signature \_\_\_\_\_  
Date \_\_\_\_\_ Country of Citizenship \_\_\_\_\_  
Residence \_\_\_\_\_  
Post Office Address \_\_\_\_\_

Full name of seventh joint inventor, if any \_\_\_\_\_  
Inventor's signature \_\_\_\_\_  
Date \_\_\_\_\_ Country of Citizenship \_\_\_\_\_  
Residence \_\_\_\_\_  
Post Office Address \_\_\_\_\_